


1/2-28-UNEF-2A BARREL THREAD SPECIFICATION

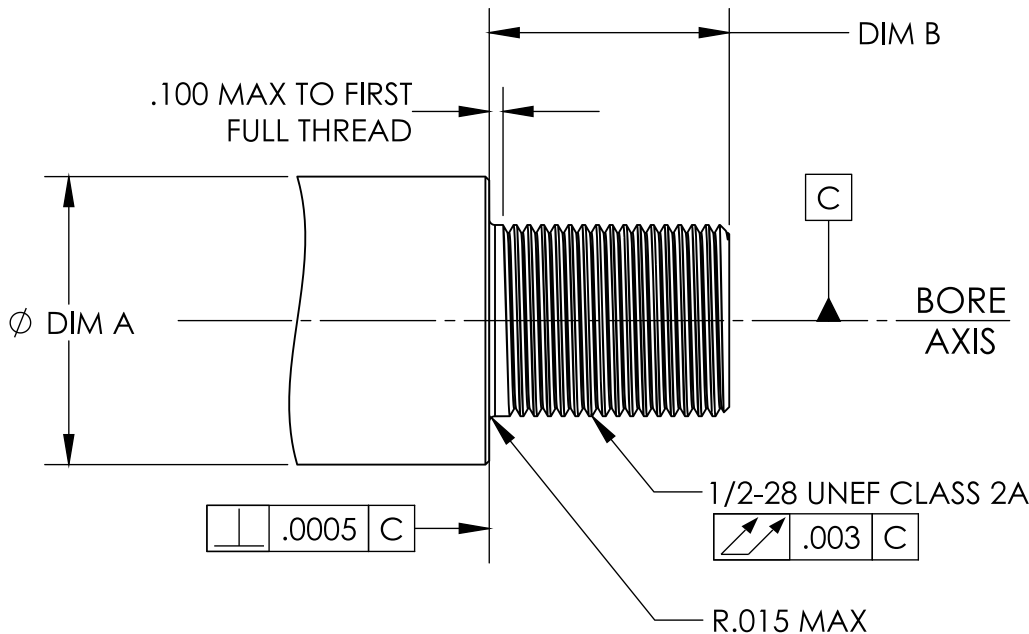

BRAKE	'DIM A'	'DIM B'	
	MINIMUM	RECOMMENDED	RANGE
HYPERTAP	.550	.625	.500-.650
M4-72	.575	.625	.500-.750
M11	.575	.625	.500-.750
M41	.575	.625	.500-.625
EFAB	.575	.625	.500-.625

TOLERANCES UNLESS OTHERWISE SPECIFIED:	PROPRIETARY AND CONFIDENTIAL	© COPYRIGHT PRECISION ARMAMENT 4110 NILES HILL ROAD WELLSVILLE, N.Y. 14895	DATE 04-18-19
DIMENSIONS ARE IN INCHES FRACTIONAL ±1/64 ANGULAR: ±1° TWO PLACE DECIMAL ±.01 THREE PLACE DECIMAL ±.005 DIA'S CONCENTRIC WITHIN .005 TIR REMOVE BURRS AND SHARP EDGES .010 x 45° MAX	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PRECISION ARMAMENT. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PRECISION ARMAMENT IS PROHIBITED.		SCALE FULL
			DRAWN BY MLV
			APPR BY MLV
MATERIAL	TITLE: 1/2-28 UNEF BARREL THREAD SPECIFICATION		
FINISH			
DO NOT SCALE DRAWING			
	DWG. NO.		REV