


11/16-24-UNEF-2A BARREL THREAD SPECIFICATION

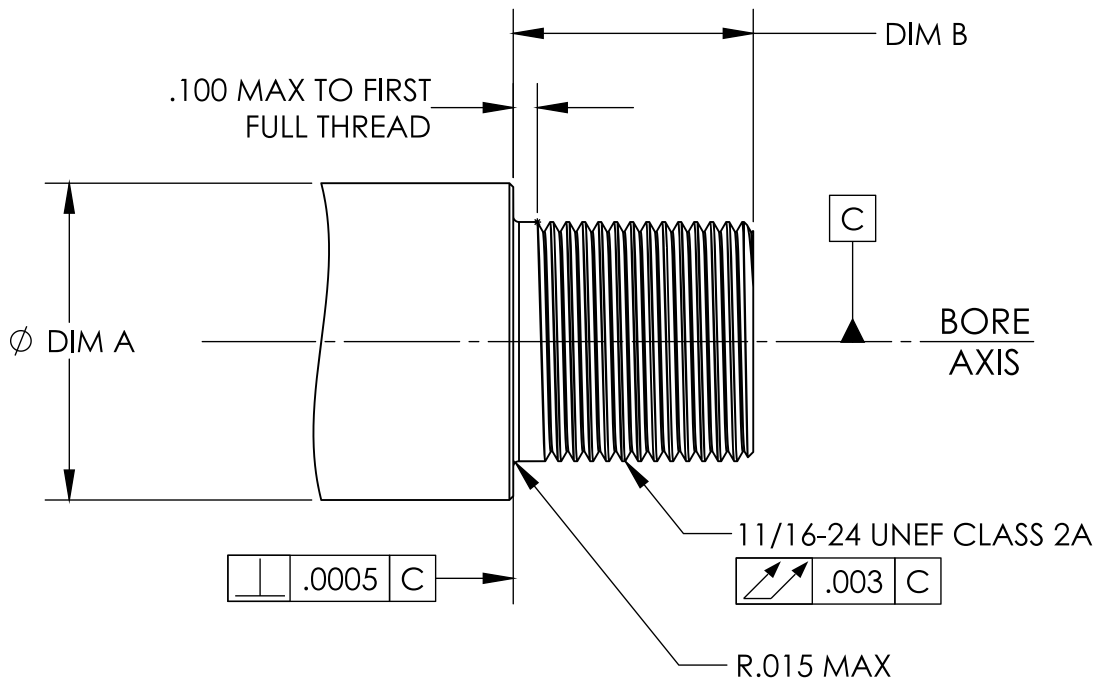

BRAKE	'DIM A'	'DIM B'	
	MINIMUM	RECOMMENDED	RANGE
HYPERTAP	.675	.625	.500-.750

TOLERANCES UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES FRACTIONAL: $\pm 1/64$ ANGULAR: $\pm 1^\circ$ TWO PLACE DECIMAL: $\pm .01$ THREE PLACE DECIMAL: $\pm .005$ DIA'S CONCENTRIC WITHIN .005 TIR REMOVE BURRS AND SHARP EDGES .010 x 45° MAX	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PRECISION ARMAMENT. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PRECISION ARMAMENT IS PROHIBITED.	PRECISION ARMAMENT 4110 NILES HILL ROAD WELLSVILLE, N.Y. 14895	DATE
			06-12-19
			SCALE
			FULL
MATERIAL	TITLE:	11/16-24 UNEF BARREL THREAD SPECIFICATION	DRAWN BY
			MLV
FINISH	DWG. NO.		APPR BY
DO NOT SCALE DRAWING			MLV
			REV