



OPEN SOURCE[®] CERTIFIED PRECISION[™] DIRECT THREAD SUPPRESSOR MOUNT

FOR DEMANDING APPLICATIONS WHERE PRECISION, DURABILITY AND WEIGHT ARE PARAMOUNT

KEY DESIGN FEATURES


- **UNIVERSAL COMPATIBILITY**
Fits all 1.375x24/HUB interface suppressors.
- **ENHANCED CLASS 3+[™] THREADS**
Our proprietary thread class provides a higher precision fit than the tightest UN Class-3 threads for superior suppressor alignment, yet also guarantees a level of thread clearance greater than UN Class-2 (SAAMI) threads for improved reliability.
- **CERTIFIED PRECISION[™]**
Alignment tolerances are up to 5x better than industry standards.
- **BACKWARDS COMPATIBLE**
Class 3+[™] threads are fully compatible with existing Class-2 and Class-3 threads and guarantee a higher precision fit with lower risk of interference when mated with them.
- **FEA OPTIMIZED**
Finite Element Analyzed for optimum strength-to-weight ratio and impact survivability.
- **ADDITIONAL FEATURES**
Compatible with industry standard HUB spanner wrenches.



PRODUCT SPECIFICATIONS

Thread Sizes	1/2x28 5/8x24 9/16x24 11/16x24 3/4x24
Interface (Suppressor Side)	HUB/UN 1.375x24 Class 3+
Interface (Gun Side)	UN Class 3+ [™]
Certified Delta Perpendicularity	=<0.0001"
Certified Delta Runout	=<0.0003"
Material	17-4 Stainless Steel
Weight	1.9oz
Diameter	1.56"
Finish	Matte Stainless, Black Nitride
MSRP	\$89.95

The Class 3+[™] Advantage

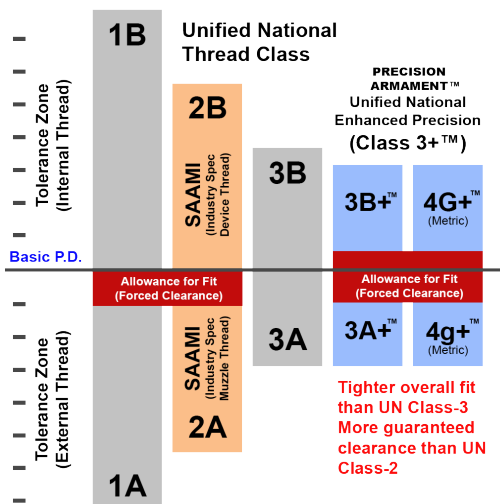

MADE IN THE USA